





UTAMA CABLES
 稳达电缆工业有限公司

PVC INSULATED, PVC SHEATHED CABLE – CU/PVC/PVC

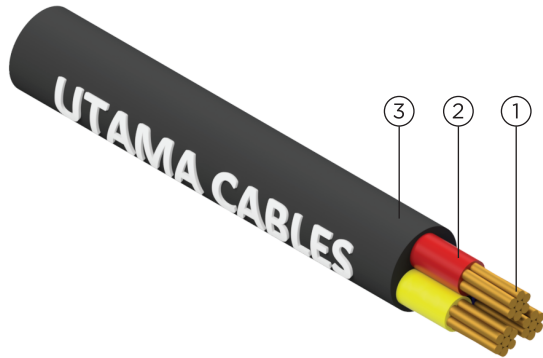

1. Cu Conductor
2. PVC Insulation
3. PVC Outer Sheath

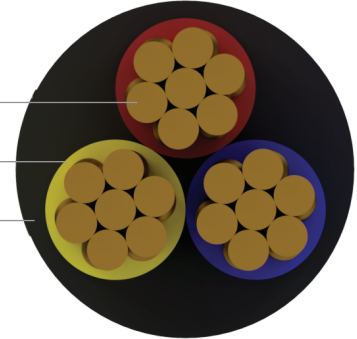

APPLICATION

PVC insulated and sheathed PVC cable. Suitable for use in power network, electrical wiring and energy distributions in underground, outdoor, indoor applications and in cable ducting.

STANDARDS

Design Specification	MS 2102
Conductor	IEC 60228

CABLE CONSTRUCTION

Conductor	Plain Annealed Copper, Class 2	
Insulation	Polyvinyl Chloride (PVC) compound; PVC/A	
Core Identification	Single Core	Black
	Two Cores	Red and Black
	Three Cores	Red, Yellow and Blue
	Four Cores	Red, Yellow, Blue and Black
	Five Cores	Red, Yellow, Blue, Black and Green/Yellow
Assembly	(i) Single Core	-
	(ii) 2, 3, 4 or 5 Cores	Stranded together and the interstices may be filled with the sheathing compound or textile. A non-hygroscopic binder tape may be applied over the laid-up cores.
Outer Sheath	Polyvinyl Chloride (PVC) compound; PVC/ST-1	
Outer Sheath Colour	Black	



UTAMA CABLES
稳达电缆工业有限公司

PVC INSULATED, PVC SHEATHED CABLE – CU/PVC/PVC

ELECTRICAL CHARACTERISTICS

Operating Voltage, U ₀ /U	600/1000V	Test Voltage	3.5kV for 5 minutes
Operating Temperature	-15°C to 70°C	Max Conductor Temperature	70°C

CU/PVC/PVC - 2 CORE

Nominal Area (mm ²)	Number / Wire Diameter (No./mm)	Thickness of Insulation (mm)	Thickness of Sheath (mm)	Approx. Overall Diameter (mm)	Approx. Cable Weight (kg/km)
1.5	7/0.53	0.80	1.80	10.00	180
2.5	7/0.67	0.80	1.80	10.80	215
4	7/0.85	1.00	1.80	12.80	285
6	7/1.04	1.00	1.80	13.80	350
10	7/1.35	1.00	1.80	16.00	445
16	7/1.70	1.00	1.80	18.40	600
25	7/2.14	1.20	1.80	21.30	770

CU/PVC/PVC - 3 CORE

Nominal Area (mm ²)	Number / Wire Diameter (No./mm)	Thickness of Insulation (mm)	Thickness of Sheath (mm)	Approx. Overall Diameter (mm)	Approx. Cable Weight (kg/km)
1.5	7/0.53	0.80	1.80	10.50	185
2.5	7/0.67	0.80	1.80	11.30	225
4	7/0.85	1.00	1.80	13.50	320
6	7/1.04	1.00	1.80	14.50	400
10	7/1.35	1.00	1.80	16.80	585
16	7/1.70	1.00	1.80	19.00	765
25	7/2.14	1.20	1.80	22.30	1110



UTAMA CABLES
稳达电缆工业有限公司

PVC INSULATED, PVC SHEATHED CABLE – CU/PVC/PVC

CU/PVC/PVC - 4 CORE

Nominal Area (mm ²)	Number / Wire Diameter (No./mm)	Thickness of Insulation (mm)	Thickness of Sheath (mm)	Approx. Overall Diameter (mm)	Approx. Cable Weight (kg/km)
1.5	7/0.53	0.80	1.80	11.30	215
2.5	7/0.67	0.80	1.80	12.30	275
4	7/0.85	1.00	1.80	14.70	390
6	7/1.04	1.00	1.80	16.50	480
10	7/1.35	1.00	1.80	19.20	705
16	7/1.70	1.00	1.80	21.40	955
25	7/2.14	1.20	1.80	23.60	1340

CU/PVC/PVC - 5 CORE

Nominal Area (mm ²)	Number / Wire Diameter (No./mm)	Thickness of Insulation (mm)	Thickness of Sheath (mm)	Approx. Overall Diameter (mm)	Approx. Cable Weight (kg/km)
1.5	7/0.53	0.80	1.80	12.80	250
2.5	7/0.67	0.80	1.80	13.80	320
4	7/0.85	1.00	1.80	16.60	440
6	7/1.04	1.00	1.80	18.00	565
10	7/1.35	1.00	1.80	20.60	865
16	7/1.70	1.00	1.80	22.60	1135
25	7/2.14	1.20	1.80	27.30	1740



UTAMA CABLES
 怡达电缆工业有限公司

PVC INSULATED, PVC SHEATHED CABLE – CU/PVC/PVC

Electrical Characteristic – PVC/PVC – Multi Core Sheathed Cables

Table A2.1b: Current Carrying Capacity

Conductor Cross-Sectional Area (mm ²)	Reference Method A (Enclosed in Conduit in Thermally Insulating Wall etc.)		Reference Method B (Enclosed in Conduit on A Wall or In Trunking)		Reference Method C (Clipped Direct)		Reference Method E (In Free Air or On A Perforated Cable Tray etc, Horizontal or Vertical)	
	One 2-Core Cable*, Single-Phase AC or DC (Amp)	One 3 or 4-Core Cable*, Three-Phase AC (Amp)	One 2-Core Cable*, Single-Phase AC or DC (Amp)	One 3 or 4-Core Cable*, Three-Phase AC (Amp)	One 2-Core Cable*, Single-Phase AC or DC (Amp)	One 3 or 4-Core Cable*, Three-Phase AC (Amp)	One 2-Core Cable*, Single-Phase AC or DC (Amp)	One 3 or 4-Core Cable*, Three-Phase AC (Amp)
1	11	10	13	11,5	15	13,5	17	14,5
1.5	14	13	16.5	15	19.5	17,5	22	18,5
2.5	18,5	17,5	23	20	27	24	30	25
4	25	23	30	27	36	32	40	34
6	32	29	38	34	46	41	51	43
10	43	39	52	46	63	57	70	60
16	57	52	69	62	85	76	94	80
25	75	68	90	80	112	96	119	101
35	92	83	111	99	138	119	148	126
50	110	99	133	118	168	144	180	153
70	139	125	168	149	213	184	232	196
95	167	150	201	179	258	223	282	238
120	192	172	232	206	299	259	328	276
150	219	196	258	225	344	299	379	319
185	248	223	294	255	392	341	434	364
240	291	261	344	297	461	403	514	430
300	334	298	394	339	530	464	593	497
400	-	-	470	402	634	557	715	597

Ambient Air Temp: 30°C

Conductor Operating Temp: 70°C

Note:

- *With or without a protective conductor.
- The above table is in accordance with 18th Edition of IEE Wiring Regulations.



UTAMA CABLES
 稳达电缆工业有限公司

PVC INSULATED, PVC SHEATHED CABLE – CU/PVC/PVC

Electrical Characteristic – PVC/PVC – Multi Core Sheathed Cables

Table 2.2b: Voltage Drop

Conductor Cross-Sectional Area (mm ²)	2-Core Cable, DC (mV/A/m)	2-Core Cable, Single-Phase AC (mV/A/m)			3, 4-Core Cable, Three-Phase AC (mV/A/m)		
		r	x	z	r	x	z
1.0	44						
1.5	29						
2.5	18						
4	11						
6	7.3						
10	4.4						
16	2.8						
		r	x	z	r	x	z
25	1.750	1.750	0.170	1.750	1.500	0.145	1.500
35	1.250	1.250	0.165	1.250	1.100	0.145	1.100
50	0.930	0.930	0.165	0.940	0.800	0.140	0.810
70	0.630	0.630	0.160	0.650	0.550	0.140	0.570
95	0.460	0.470	0.155	0.500	0.410	0.135	0.430
120	0.360	0.380	0.155	0.410	0.330	0.135	0.350
150	0.290	0.300	0.155	0.340	0.260	0.130	0.290
185	0.230	0.250	0.150	0.290	0.210	0.130	0.250
240	0.180	0.190	0.150	0.240	0.165	0.130	0.210
300	0.145	0.155	0.145	0.210	0.135	0.130	0.185
400	0.105	0.115	0.145	0.185	0.100	0.125	0.160

Ambient Air Temp: 30°C
 Conductor Operating Temp: 70°C

Note:

- Correction factors for ambient temperature and group installation, please refer Derating Factor section.
- r = Resistive Component, x = Reactive Component, z = Impedance Value
 The above table is in accordance with the 18th Edition of IEE Wiring Regulations.
- For cables having conductors of 16mm² or less cross sectional area their inductances can be ignored and (mV/A/m)_r values only are tabulated. For cables having conductors greater than 16mm², cross sectional area the impedance values are given as (mV/A/m)_z, together with the resistive component (mV/A/m)_r and the reactive component (mV/A/m)_x.

The above paragraph is extracted from Appendix 4 of the 18th Edition of IEE Wiring Regulations.

The information contained within this datasheet is for guidance only and is subject to change without notice or liability. All the information is provided in good faith and is believed to be correct at the time of publication. When selecting cable accessories, please note that actual cable dimensions may vary due to manufacturing tolerances.